


valvole a sfera ball valves

1595

Valvola a sfera "mini" F-F
Ball valve "mini" F-F

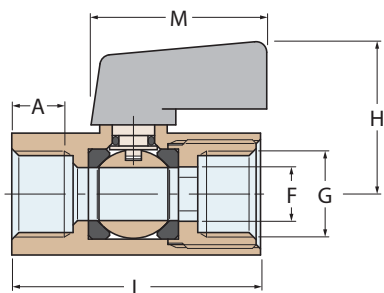

FILETTATURE / THREAD :
G = ISO 228/1 (BS 2779)




Ottone nichelato
Nickel-plated brass

1595 ■ ■ ■

PN	10	10	10
Weight (gr)	90	85	115
M	34	34	34
H	28	28	31
L	41	41	45
F	7.5	7.5	9.5
A	10	10	10
G	1/4"	3/8"	1/2"

1596

Valvola a sfera "mini" M-F
Ball valve "mini" M-F

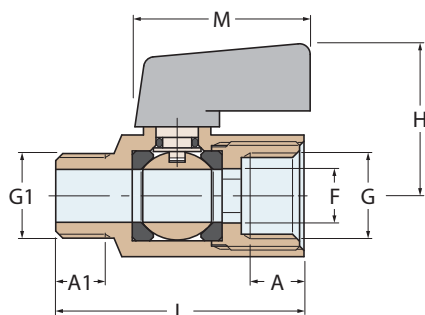

FILETTATURE / THREAD :
G - G1 = ISO 228/1 (BS 2779)




Ottone nichelato
Nickel-plated brass

1596 ■ ■ ■

PN	10	10	10
Weight (gr)	70	80	100
M	34	34	34
H	28	28	31
L	41	41	45
F	7.5	7.5	9.5
A1	8	10	10
A	10	10	10
G - G1	1/4"	3/8"	1/2"

1134

Rubinetto di scarico a sfera maschio
con maniglia
Drain cock with male end lever operated

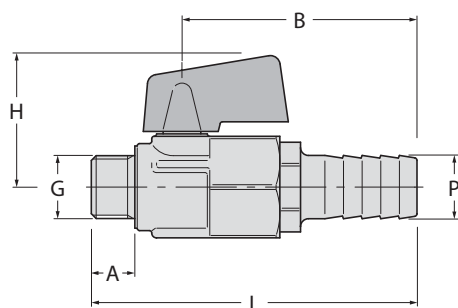

FILETTATURE / THREAD :
G = ISO 228/1 (BS 2779)



Ottone nichelato
Nickel-plated brass

1134 ■

PN	10
Weight (gr)	100
H	29
A	9
L	71
B	52
P	12
G	1/4"

C1