


valvole a sfera ball valves

1577

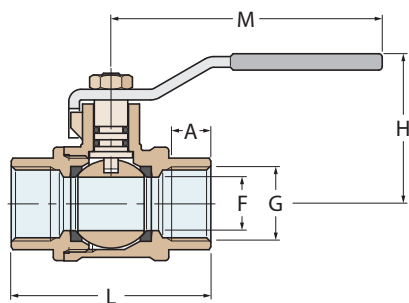

Valvola a sfera F-F passaggio totale a leva
Lever operated ball valve F-F full flow

Conforme alla norma
Compliant with
UNI EN ISO 9093-1




Ottone nichelato
Nickel-plated brass

1577	■	■	■	■	■	■
PN	40	40	40	40	40	40
Weight (gr)	236	343	545	830	1350	2320
M	100	100	120	120	157	157
H	46	49	62	67	85	92
L	58	66	76	89	101	119
F	15	20	25	32	40	50
A	16	17	19.1	21.4	21.4	25.7
G	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"

FILETTATURE / THREAD :
G = EN 10226/1 (BS 21)

1815

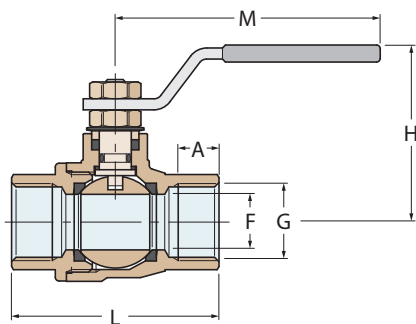

Valvola a sfera F-F
passaggio totale a leva
Lever operated ball valve F-F full flow




Acciaio Inox
Stainless steel

1815	■	■	■	■	■	■	■	■	■	■
PN	100	100	100	64	64	40	40	40	40	40
Weight (gr)	220	205	275	465	710	1180	1740	2930	6200	9000
M	110	110	110	140	140	180	180	230	270	270
H	52	52	55	66	70	85	91	105	140	148
L	50	50	60	70	85	95	105	125	162	178
F	8	10	15	20	25	32	40	50	65	80
A	11.4	11.4	15	16.3	19.1	21.4	21.4	25.7	32.5	32.5
G	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"

FILETTATURE / THREAD :
G = EN 10226/1 (BS 21)

1850

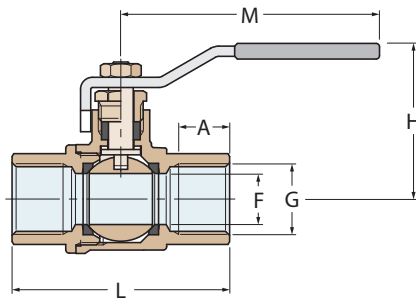

Valvola a sfera F-F passaggio totale a leva
serie "2000"

Lever operated ball valve F-F - full flow
"2000" series

Conforme alla norma
Compliant with
UNI EN ISO 9093-1



Ottone nichelato
Nickel-plated brass

Versione con leva in
acciaio inox
Version with lever in
stainless steel

1850	■	■	■	■	■	■	■	■	■
1851	■	■	■	■	■	■	■	■	■
PN	63	63	63	63	63	40	25	25	25
Weight (gr)	150	180	280	465	750	1375	2050	3500	5250
M	95	95	95	115	115	155	155	175	232
H	42	42	46	55	60	77	78	100	110
L	46	52	66	76	90	110	120	140	164
F	10	10	15	20	25	32	40	50	65
A	10	11.4	15	16.3	19.1	21.4	21.4	25.7	30.1
G	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"

FILETTATURE / THREAD :
G = EN 10226/1 (BS 21)

1851