

700 Series

Fuel Filter/Water Separators With Integrated Priming Pump



700 Series fuel filter/water separators come equipped with a state-of-the-art fuel priming pump for easy priming. The 12 vdc roller-cell fuel pump offers the benefits of an electric on-demand priming pump at a push of a button, and the 24 vdc brushless version directly drives the gerotor creating a unique, positive on-demand displacement pump.

The gerotor has fewer parts than gear or vane pumps, and the sensor-less control technology of the DC motor makes this product the most reliable filter and pump assembly on the market. The 24 vdc pump assembly is ideal for tough on-engine applications. For off-engine mounting, the 12 vdc pumps are a more economical alternative.



Contact Information:

Parker Hannifin Corporation
Racor Division
P.O. Box 3208
3400 Finch Road
Modesto, CA 95353

phone 800 344 3286
209 521 7860
fax 209 529 3278
racor@parker.com

www.parker.com/racor
www.parker.com/racorproducts

Product Features:

- Aluminum filter head with integral mounting bracket and four ports (2 inlets and 2 outlets) with 7/8"-14 SAE o-ring threads.
- Self-venting drain.
- 12 volt or 24 volt electronic priming pump.
- Rugged and reliable.
- Replaceable Aquabloc® spin-on filter.
- Reusable, clear collection bowl.
- 100 micron prefilter screen.
- Water-in-fuel (WIF) water detection probe.
- Vent valve to purge air during fuel priming.



ENGINEERING YOUR SUCCESS.

700 Series Overview

Problem

- Filters are often installed in hard to reach places for re-priming.
- Air can get in fuel lines during filter change-out or storage.
- Pre-filling filter can be messy.
- Distance between tank and filter can be inconvenient for hand priming.

Solution

Racor 700 Series Integrated Fuel Filter/Water Separator with a two stage filtration and re-priming system.

- Simplifies service.
- No messy pre-filling.
- Protects engine.
- No lag in starting engine.
- Fast and safe re-priming.

How it works

The 700 Series pump/fuel filter water separator assemblies are two stage filtration and re-priming systems.

These complete fuel management systems isolates contaminants present in diesel fuels and traps them prior to reaching the fuel injection system, protecting the engine's fuel system from costly and premature failure.

Features and Benefits

- Compatible with Racor 345, 360, 390, 400, and 700 Series heads and bowls.
- High contaminant capacity.
- Improved water removal.
- Available with 10 or 30 micron Aquabloc® media.
- Great for heavy-duty and biodiesel applications.
- Flow 45 to 120 GPH (170 to 454 LPH) in upgraded applications.
- Easy upgrade with existing Racor parts.
- Optimum engine protection.

R125 Spin-on Filter



Racor spin-on fuel filter/water separators are well known for high quality performance and engine protection.

If you currently use a Racor 360, 400, 600, or 700 series fuel filter/water separator, you can now upgrade to the R125 replacement filter without the need to purchase a new bowl.

The R125 is a great fit for heavy-duty and biodiesel applications. More Aquabloc® media in the R125 provides up to 3X the life and improved water removal when compared to standard filters.

How to Order

745R	30	24'
Select a model 745R= 45 GPH 760R= 60 GPH 790R= 90 GPH 7125= 120 GPH	Specify micron rating: 30 micron 10 micron	Specify a 24 vdc priming pump. (see note)

Basic model comes standard with 12 vdc priming pump. ¹To order the 24 vdc brushless pump assembly, insert 24 at the end of the part numbers. (example: 790R3024). Note: Pump is for priming purposes only, not for continuous operations unless protected by a pre-filter.



Specifications	745R30	760R30	790R30	7125R30
Maximum Flow Rate	45 GPH (170 LPH)	60 GPH (227 LPH)	90 GPH (340 LPH)	120 GPH (454 LPH)
Replacement Filter	R45P or R45T	R60P or R60T	R90P or R90T	R125P or R125T
Height	10.8 in. (27.4 cm)	11.8 in. (30.0 cm)	12.8 in. (32.5 cm)	15.8 in. (40.1 cm)
Width	4.3 in. (10.9 cm)	4.3 in. (10.9 cm)	4.3 in. (10.9 cm)	4.3 in. (10.9 cm)
Depth	6.5 in. (16.5 cm)	6.5 in. (16.5 cm)	6.5 in. (16.5 cm)	6.5 in. (16.5 cm)
Weight (dry)	4.5 lbs (2.0 kg)	5.5 lbs (2.5 kg)	6.5 lbs (2.9 kg)	7.7 lbs (3.5 kg)
Clean Pressure Drop	0.25 PSI (0.02 bar)	0.25 PSI (0.02 bar)	0.25 PSI (0.02 bar)	0.25 PSI (0.02 bar)
Ambient Temperature Range	-40° to +225°F (-40° to +107°C)			
Maximum Fuel Temperature	190°F (88°C)			


Product Information and Specifications

The R125 series is a direct replacement for the 345, 360, 390, 400, 600, and 700 series Racor fuel filter water separator. The filter mounting head and collection bowl are compatible with the R125 series spin-on filter. If an engine is using a R45, R60, or R90 spin-on filter, it can now be upgraded to a R125 series without the need to purchase a new bowl or mounting head. Now it is easier than ever to get more capacity and flow without buying extra parts.

The R125P (30 micron) is a great fit for biodiesel applications as it is a larger filter with more filtration capacity. A larger filter adds more filtration media surface area, which lowers the flow velocity going through each square inch of the media. This extends filter life and increases water removal efficiency. All filter materials and seals are compatible with ultra-low sulfur diesel (ULSD) fuel and B2 Biodiesel.

The R125 Series is available for order with (R125S) 2 micron, (R125T) 10 micron, and (R125P) 30 micron proven Aquabloc® media.

Benefits include optimum engine protection with Aquabloc® media, high contaminant capacity, flows up to 120 GPH (454 LPH), and easy change out with existing Racor parts.

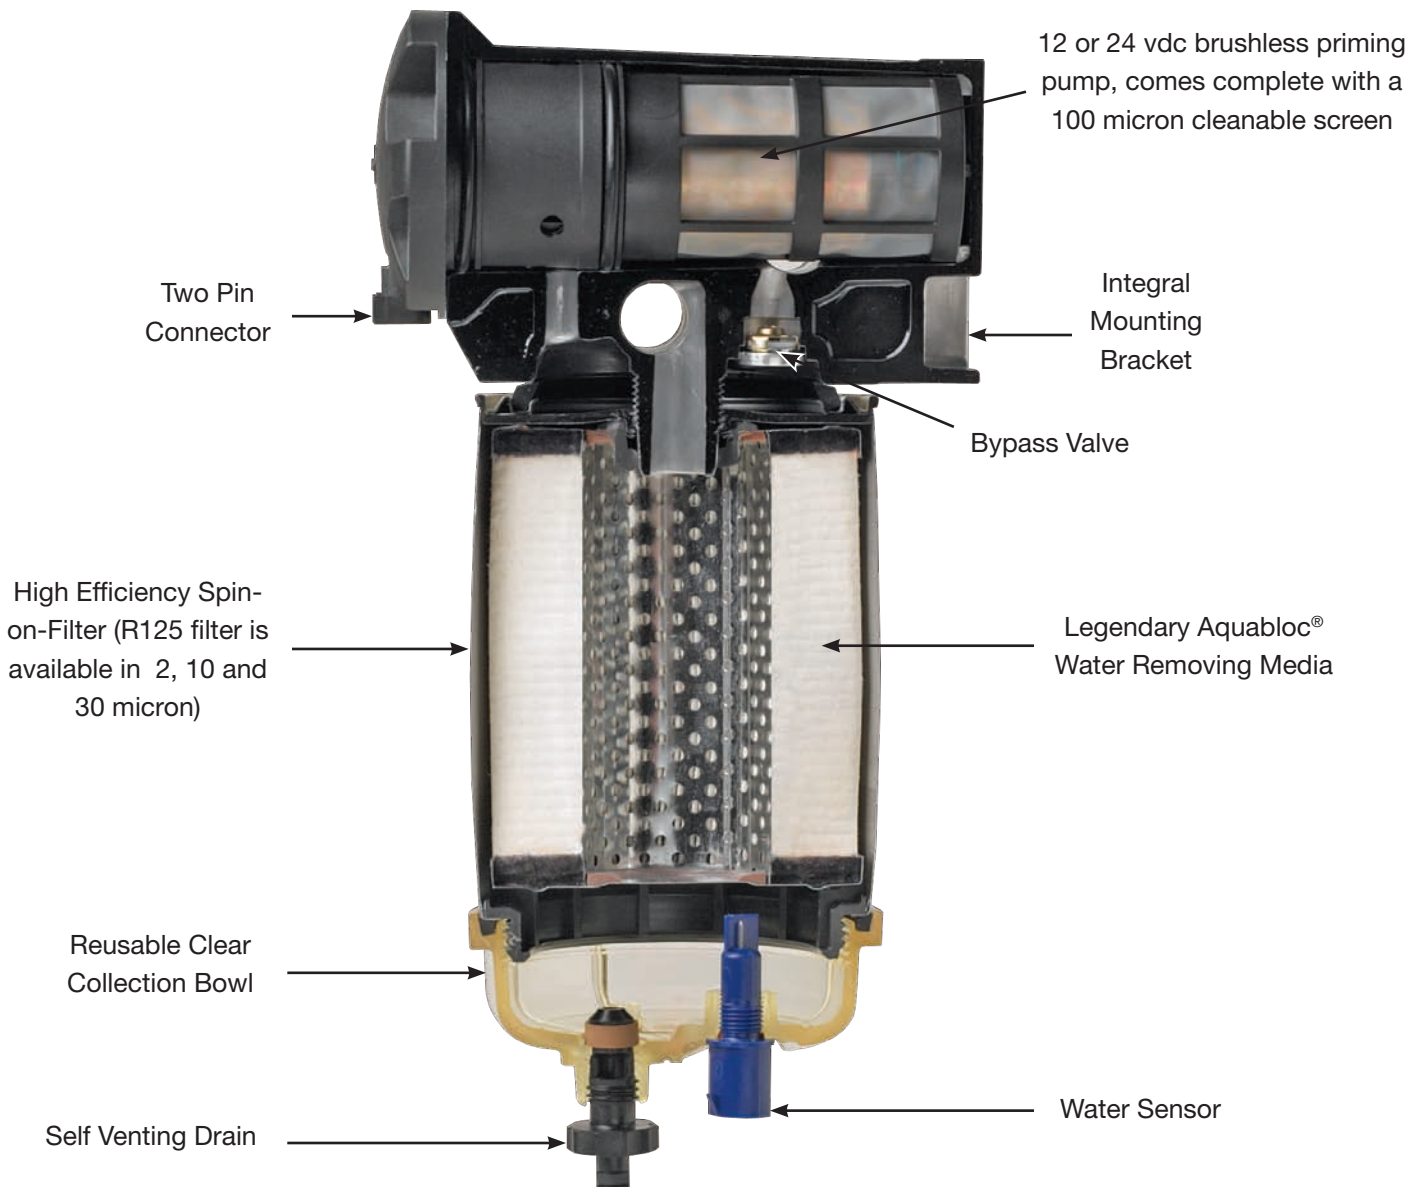

Parker Hannifin Corporation
Filtration Group
Global Headquarters
 6035 Parkland Boulevard
 Cleveland, OH 44124-4141
 T 216 896 3000, F 216 896 4021
www.parker.com

North America
Compressed Air Treatment
Filtration & Separation/Balston
 242 Neck Road
 Haverhill, MA 01835-0723
 T 978 858 0505, F 978 858 0625
www.parker.com/balston

Filtration & Separation/Finite
 500 Glaspie Street, PO. Box 599
 Oxford, MI 48371-5132
 T 248 628 6400, F 248 628 1850
www.parker.com/finitefilter

Purification, Dehydration and
Filtration Division
 4087 Walden Avenue
 Lancaster, NY 14086
 T 716 685 4040, F 716 685 1010
www.airtek.com

Sales Office
 5900-B Northwoods Parkway
 Charlotte, NC 28269
 T 704 921 9303, F 704 921 1960
www.domnickhunter.com

Engine Filtration &
Water Purification

Racor
 3400 Finch Road, PO Box 3208
 Modesto, CA 95353
 T 209 521 7860, F 209 529 3278
www.parker.com/racor

Racor
 850 North West St., PO Box 6030
 Holly Springs, MS 38635
 T 662 252 2656, F 662 274 2118
www.parker.com/racor

Racor
 302 Parker Drive
 Beaufort, SC 29906
 T 843 846 3200, F 843 846 3230
www.parker.com/racor

Racor -- Village Marine Tec.
 2000 West 135th Street
 Gardena, CA 90249
 T 310 516 9911, F 310 538 3048
www.villagemarine.com

Hydraulic Filtration
Hydraulic Filter

16810 Fulton County Road #2
 Metamora, OH 43540-9714
 T 419 644 4311, F 419 644 6205
www.parker.com/hydraulicfilter

Process Filtration
Process Advanced Filtration
 2340 Eastman Avenue
 Oxnard, CA 93030
 T 805 604 3400, F 805 604 3401
www.parker.com/processfiltration

© 2009 Parker Hannifin Corporation
 Bulletin 7631 Rev D (August 2009)

Europe
Compressed Air Treatment
domnick hunter Industrial
 Dukesway, Team Valley Trading Estate
 Gateshead, Tyne & Wear
 England NE11 0PZ
 T +44 (0) 191 402 9000,
 F +44 (0) 191 482 6296
www.domnickhunter.com

Hiross Zander
Padova Business Unit
 Strada Zona Industriale 4
 35020 S. Angelo di Piove Padova, Italy
 T +39 049 9712 111, F +39 049 9701 911
www.dh-hiross.com

Hiross Zander
Essen Business Unit
 Zander Aufbereitungstechnik GmbH
 Im Teelbruch 118
 D-45219 Essen, Germany
 T +49 2054 9340, F +49 2054 934164
www.zander.de

Parker Gas Separations
 Oude Kerkstraat 4
 P O Box 258
 4870 AG Etten- Leur, Netherlands
 T +31 76 508 5300, F +31 76 508 5333

Engine Filtration &
Water Purification

Racor
 Shaw Cross Business Park
 Churwell Vale Dewsbury,
 WF12 7RD England
 T +44 (0) 1924 487000,
 F +44 (0) 1924 487038
www.parker.com/rfde

Racor Research & Development
 Parker Hannifin GmbH & Co KG
 Inselstrasse 3 – 5
 70327 Stuttgart Germany
 T +49 (0)711 7071 290-0,
 F +49 (0)711 7071 290 -70
www.parker.com/racor

Hydraulic Filtration
Hydraulic Filter
 Stieltjesweg 8, 6827 BV
 P.O. Box 5008 6802 EA
 Arnhem, Holland
 T +31 26 3760376, F +31 26 3643620
www.parker.com/eurofilt

Urjala Operation
 Salmentie 260
 31700 Urjala as Finland
 T +358 20 753 2500, F +358 20 753 2501
www.parker.com/fi

Condition Monitoring Center
 Brunel Way Thetford,
 Norfolk IP 24 1HP England
 T +44 1842 763299, F +44 1842 756300
www.parker.com/cmc

Process Filtration
domnick hunter Process
 Durham Road, Birtley Co. Durham,
 DH3 2SF England
 T +44 (0) 191 410 5121,
 F +44 (0) 191 410 5312
www.domnickhunter.com

Asia Pacific
Australia
 9 Carrington Road, Castle Hill
 NSW 2154, Australia
 T +61 2 9634 777, F +61 2 9899 6184
www.parker.com/australia

China
 280 YunQiao Road
 JinQiao Export Processing Zone
 Shanghai 101206 China
 T +86 21 5031 2525, F +86 21 5834 3714
www.parker.com/china

India
 Plot EL 26, MIDC, TTC Industrial Area
 Mahape, Navi Mumbai 400 709 India
 T +91 22 5613 7081, 82, 83, 84, 85
 F +91 22 2768 6618 6841
www.parker.com/india

Japan
 626, Totsuka-cho, Totsuka-ku
 Yokohama-shi, 244-0003 Japan
 T +81 45 870 1522, F +81 45 864 5305
www.parker.com/japan

Korea
 1-C Block, Industrial Complex of Jangan,
 615-1, Geumui-Ri Jangan-Myeon,
 Hwaseong-City Gyeonggi-Do, Korea
 T +82 31 359 0771, F +82 31 359 0770
www.parker.com/korea

Singapore
 11, Fourth Chin Bee Road
 Singapore 619 702
 T +65 6887 6300, F +65 6261 4929
www.parker.com/singapore

Thailand
 1023 3rd Floor, TPS Building
 Pattanakam Road, Suanluang,
 Bangkok 10250 Thailand
 T +66 2717 8140, F +66 2717 8148
www.parker.com/thailand

Latin America
Parker Comercio Ltda.
Filtration Division
 Estrada Municipal Joel de Paula
 900 Eugenio de Melo,
 Sao Jose dos Campos
 CEP 12225390 SP Brazil
 T +55 12 4009 3500, F +55 12 4009 3529
www.parker.com/br

Pan American Division - Miami
 7400 NW 19th Street, Suite A
 Miami, FL 33128
 T 305 470 8800 F 305 470 8808
www.parker.com/panam

Africa
Parker Hannifin Africa Pty Ltd
 Parker Place, 10 Berne Avenue,
 Aeroport Kempton Park,
 1620 South Africa
 T +27 11 9610700, F +27 11 3927213
www.parker.com/eu

