


prese e scarichi a mare water intakes and thru-hulls

1123

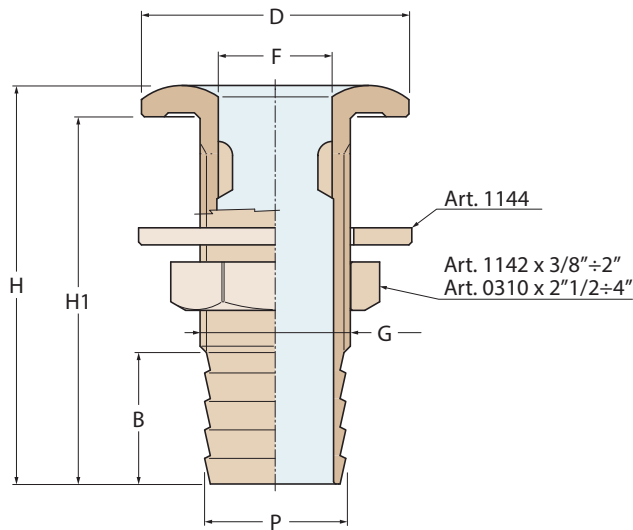

Scarico a mare con portagomma
Thru-hull connection with hose adaptor

Omologato RINA
RINA validated

Conforme alla norma
Compliant with
UNI EN ISO 9093-1



Ottone sabbato
Yellow brass

1123C




Ottone cromato
Chromium-plated brass

FILETTATURE / THREAD :
G = ISO 228/1 (BS 2779)

	80	110	190	320	435	620	950	1860	2300	4000
1123	■	■	■	■	■	■	■	■	■	■
1123C	■	■	■	■	■	■	■	■	■	■
Weight (gr)	80	110	190	320	435	620	950	1860	2300	4000
H	55	65	70	85	86	96	107	130	158	209
H1	50	60	65	80	80	90	100	122	150	200
F	12	15	20	25	33	39	50	63	76	100
D	32	36	46	54	63	70	85	110	123	150
B	18	22	22	27	27	27	33	38	48	60
P	15	18	24	30	39	45	57	72	82	110
G	3/8"	1/2"	3/4"	1"	1"1/4	1"1/2	2"	2"1/2	3"	4"

1255

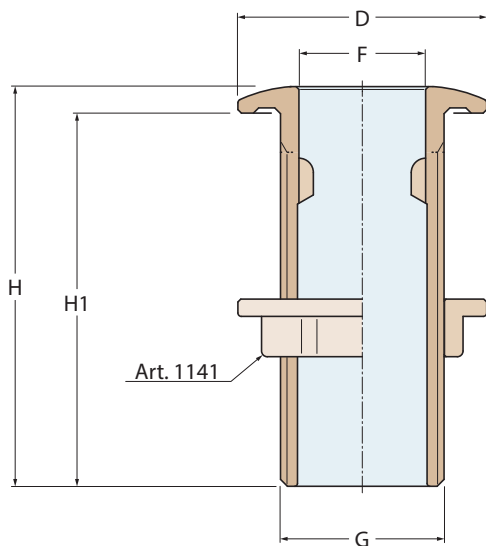

Scarico a mare serie "export" normale
Thru-hull connection "export" normal series

Omologato RINA
RINA validated

Conforme alla norma
Compliant with
UNI EN ISO 9093-1



Ottone sabbato
Yellow brass

1255C



Ottone cromato
Chromium-plated brass

FILETTATURE / THREAD :
G = ISO 228/1 (BS 2779)

	60	100	160	255	345	450	640
1255	■	■	■	■	■	■	■
1255C	■	■	■	■	■	■	■
Weight (gr)	60	100	160	255	345	450	640
H	54	65	70	75	75	76	76
D	30	35	42	50	60	66	82
H1	50	61	65	70	70	70	70
F	12	15	20	25	34	39	50
G	3/8"	1/2"	3/4"	1"	1"1/4	1"1/2	2"